


Realtime T304F

Face with Finger Attendance cum Simple Access Control System

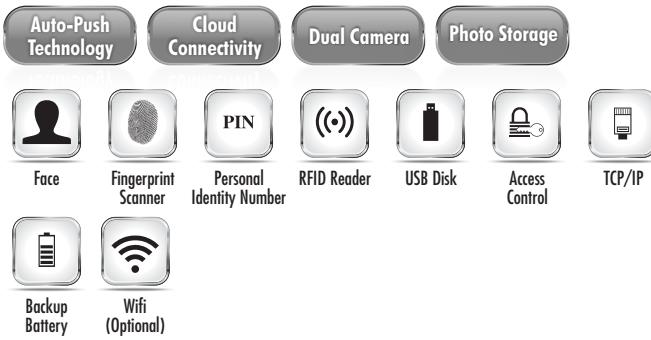

Specifications

- » Face capacity 1000
- » Card capacity 5000
- » Fingerprint capacity 5000
- » Max Attendance log 300,000
- » Management log 10000
- » Identify mode Face, Fingerprint, card, password and combinations
- » Display language English
- » LED 1 (Red-Green dual color)
- » Wiegand input Inside and outside Wiegand(26/34)
- » Communication TCP/IP, WIFI (optional)
- » U-disk Supported
- » Audio output Voice Interface
- » Battery 3 Hours Battery Backup
- » Working voltage DC12V ± 5% (current : below 1.5A)
- » Working temperature -10°C~+60°C
- » Working humidity(RH) 20% ~ 80%
- » Self-test function Supported
- » Power management Sleep Mode
- » FAR/ FRR 0.001/1(%)
- » Identify speed ≤1.0 seconds
- » Matching mode Supports 1:N
- » FAR/ FRR 0.00001/0.1(%)
- » Identify speed ≤1.0 second (when enrolled 5000 fingerprints)
- » Fingerprint input angle 360°(any angle)
- » Intelligent adaptation function Support
- » Matching mode Support 1:N