

# Matrix Extension Bay

## DME-6432

### ◆ Picture




### ◆ Feature


- This Unit can be extended up to 3units to one another
- Max. 255Cameras Input, 32Monitors Output
- With exclusive Processing chip for Video Signal, the best quality video signal can be displayed
- Easy assembly and disassembly by using exclusive connector cable
- Address of each unit (DME-6432) can be set at user's option.
- Color, B/W can be processed




### ◆ Dimensions

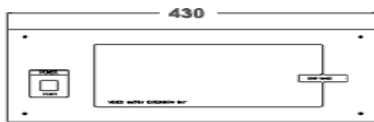

**FRONT**



**BACK**

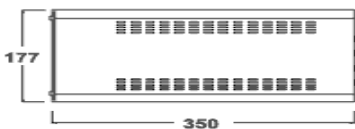

**SIDE**

(Unit:mm)

Unit: mm

### ◆ Specifications

MODEL	DME-6432
System	64Camera Input(NTSC/PAL)
	Extension Output 32 Channel
	RS-232 TTL Interface
	Alarm Interface
	Network Interface
Funtion	64 Camera Input Control
Camera Input	Anti-Noise synchronization creates smooth conversion of video arising when converting the video
Extension In/ Output	64EA(BNC Connector)
Communication	40Pin Connector 2EA
Power Consumption	Camera Control-38400,N,8,1(TTL Level)
Operating Temp	Power Supply 190~240V, 50/60Hz, Built-in 350 W Max. Consumption of electric power - 50W
Weight	0°C ~ +40°C
Dimensions	Approx 10Kg
	430(W) x 177 (H) x 350 (D)mm