

DVR-1600S

◆ Picture




◆ Feature

- High quality video Display and Recording
- Compression: H.264 for video, G.723.1 for Audio
- Real time recording and Playback support
- Smart Phone and USB2.0 for backup support (DVD Player: Optional)
- Static IP as well as Dynamic IP and DDNS support
- Can Control DVR by Controller, DCK-500B Up to 99pcs



◆ Dimensions

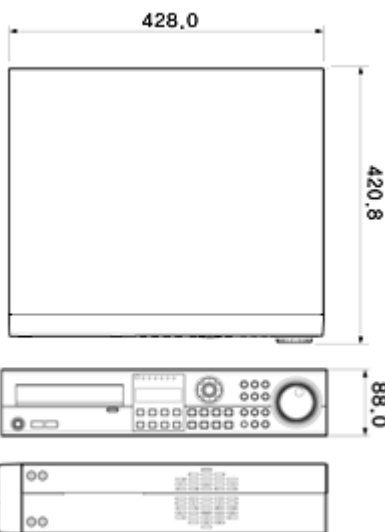

Unit: mm

◆ Specifications

| Description | | DVR-1600S |
|--------------------|----------------|--|
| Operating System | | Embedded Linux |
| Video | Input | 16CH composite Video BNC |
| | Output | BNC(1), VGA(1), Loop Out(16), S-VHS(1) VGA Resolution 1024x780 |
| Audio | Input/Output | 4CH Input and 1CH Output |
| Resolution | Display | NTSC:720x480, PAL:720x576 |
| | Recording | NTSC: 720x480, 720x240, 352x240, PAL: 720x576, 720x288, 352x288 |
| Split mode in live | | 1, 4, 6, 8, 9, 10, 13, 16 |
| Compression | Algorithm | H.264 for video, G.723.1 for audio |
| Operation | Triplex | Recording, Playback, Network |
| Recording | Speed | 480(352x240), 240(720x240), 120(720x480) NTSC / 400(352x288), 200(720x288), 100(720x576) PAL, |
| | Mode | Emergency, Schedule, Sensor, Motion, Sensor + Motion, Pre & post Alarm Recording |
| Search | Mode | Calendar, Date & Time, Event Search, First Search, Last Search |
| | Speed | x1, x2, x4, x8, x10 |
| Alarm | Input / Output | 4ch / 1ch |
| Backup | External | USB 2.0, Network backup |
| HDD | Management | SATA HDD (Max 2) |
| Network | Protocol | Static IP, DHCP & DDNS |
| | interface | 10/100 Base - Tx Ethernet (RJ-45) |
| | Max connector | 4 users |
| | Access Type | Network Client Software / Web Viewer / CMS |
| PTZ | Pan/Tilt/Zoom | RS485 |
| System Operation | | Front Button, USB Mouse, IR Remote Controller |
| Dimension | | 428mm(W) X 420mm(D) X 88mm(H) |
| Power Consumption | | Max. 60W |
| Power | | DC12V 6A 50Hz/60Hz |